

Application Note 1002

Traffic Monitoring Using Doppler Radar Speed Sensor

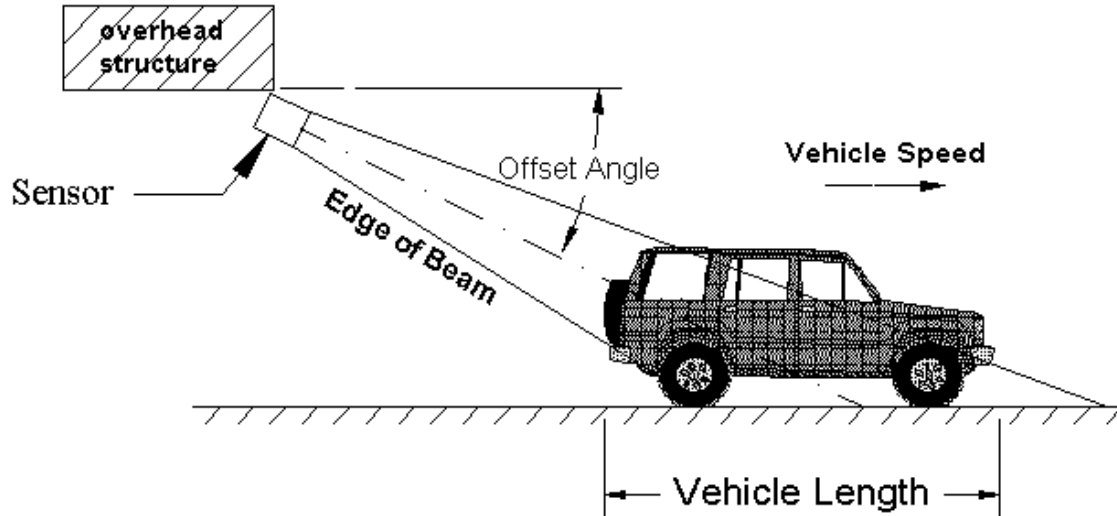


Figure 1 - Freeway Test Setup

In this application, the Doppler Speed Sensor was used to monitor traffic on a highway in a single lane. The data collected using the sensor was used in counting vehicles, measuring their speeds and performing approximate vehicle classifications.

Test Setup

The sensor was mounted on an overpass, pointing down toward the roadway at approximately a 30° angle from the horizontal. This angle was chosen because it allowed the sensor to see the complete width of the lane, without tracking vehicles in adjacent lanes. The sensor output was sampled by a counter channel on a Data Acquisition System, which converted the frequency output of the speed sensor to MPH and corrected for the offset angle. The test was also monitored using a video camera.

Example Data

An excerpt of the test data is shown in Figure Two which demonstrates that the vehicle speeds can be measured as well as vehicle counts. Notice that longer vehicles can be distinguished from shorter vehicles by the length of time that the sensor was locked allowing approximate classification of vehicles.

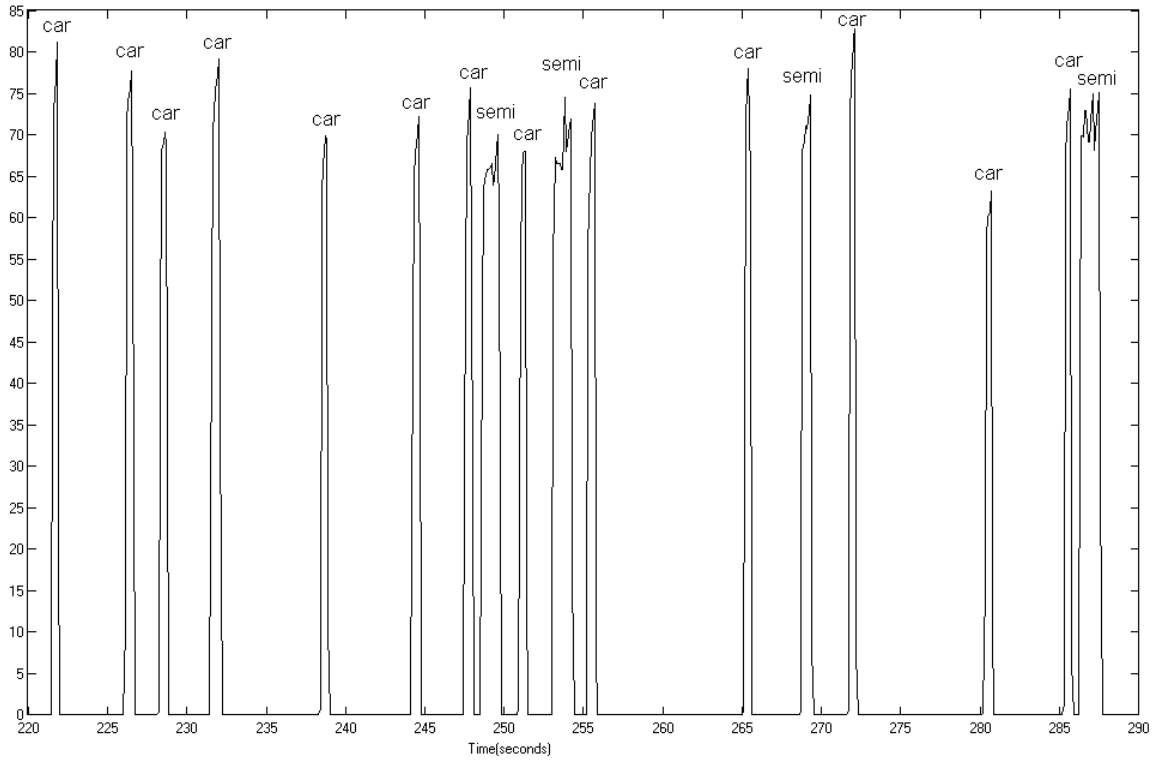


Figure 2 - Vehicle Speed (MPH) vs. Time (s)

Contact Us

GMH Engineering personnel are available to discuss applications using the Delta Non-Contact Speed Sensor. If you have questions, please contact us at (801) 225-8970 or info@gmheng.com.

Information furnished by GMH Engineering is believed to be accurate & reliable. No responsibility is assumed, however, by GMH Engineering for its use, whether correct or incorrect; nor can GMH Engineering be held liable for consequences or any infringements of patents or other rights of third parties which may result from its use. Information in this document is current as of date of writing and is subject to change.

Rev 1.0